

# C600

## Specifications

---



|   |                                      |
|---|--------------------------------------|
| <b>Lifting capacity Single Circuit:</b> | 600 kg                               |
| <b>Lifting capacity Dual Circuit:</b>   | 300 kg                               |
| <b>Rotation range:</b>                  | Endless, with four locking positions |
| <b>Tilting range:</b>                   | 90° with six locking positions       |
| <b>Machine weight:</b>                  | 30 kg                                |
| <b>Suction cup dimensions:</b>          | 800 x 480 mm                         |
| <b>Machine height:</b>                  | 175 mm                               |
| <b>Battery:</b>                         | 12VDC, 9Ah                           |

# C600

## Specifications

---

**The vacuum lifter for glass up to 600 kg. Standard equipped with double vacuum system for loads up to 300 kg. The machine itself weighs just 30 kg. The machine is optionally available with radio control and shortened lifting arm.**

All our products are designed in close cooperation with users from the field. This results in products that are a class apart when it comes to the details and provide the user with every convenience in daily use.

### Unique features

- Can easily be taken out of and put back in vehicle by one person
- Lightweight vacuum lifter with double-circuit
- Machine weight: 30 kg
- Maximum lifting capacity: 300 / 600 kg

### Delivered standard with:

- Remote control
- Transport trolley
- Short lifting arm
- Swappable battery system incl. spare battery

---

### Accessories



Battery



Remote control




Lifting arm

## Specifications

- Angle adjustment specially intended for interior glazing
- Rotation with four locking positions
- Radio remote control of suction and release
- Short lifting arm for interior glazing
- Transport trolley with pneumatic tyres

## Dimensions

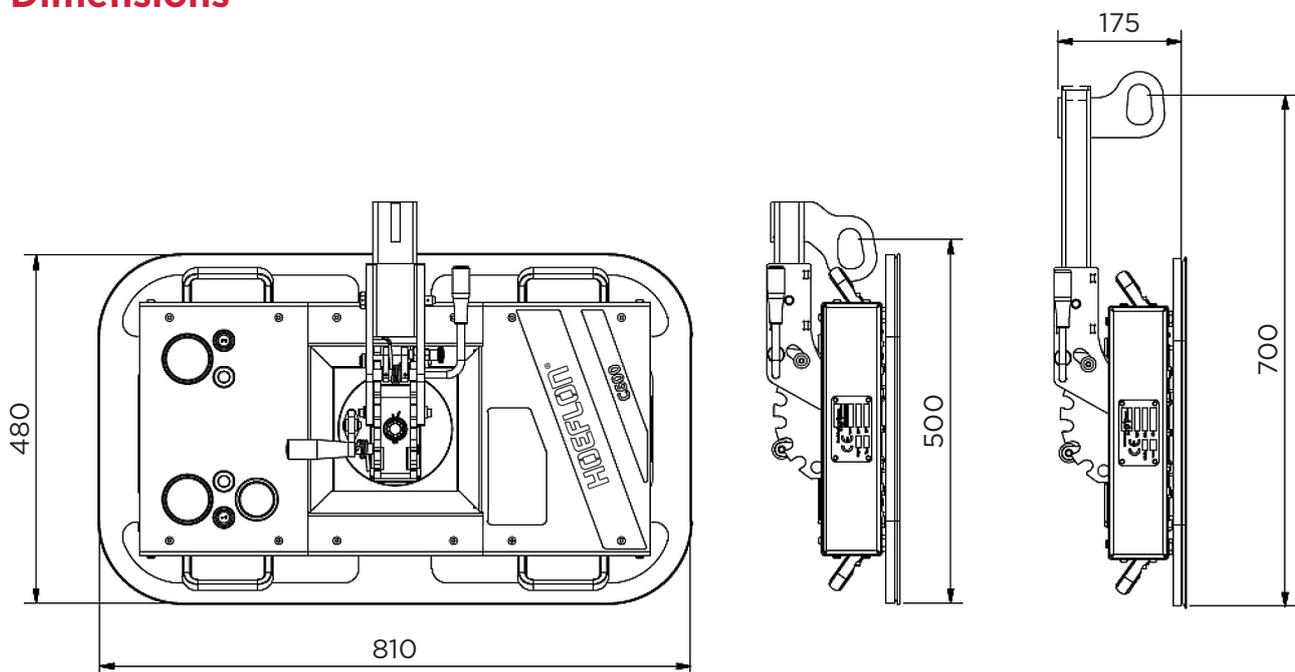

# C600

Specifications

# HOEFLON®

## Your Hoeflon contact person

Hoeflon machines are functional and offer optimal power and reliability. We offer many possibilities and help you come up with solutions.

> Your Hoeflon® dealer <



**Hoeflon International B.V.**  
Zwolleweg 2  
3771 NR Barneveld, NL

T +31 (0)342 400288  
info@hoeflon.com  
KVK 66408962

BIC ABNANL2A  
BTW NL856539806B01  
IBAN NL96ABNA0457114533

[www.hoeflon.com](http://www.hoeflon.com)